

# PRIME FIRE 700 IN CASING

## AUTOMATIC ETHANOL FIREPLACE

BEV Technology<sup>®</sup>

### FLAME CONTROL

Have control over the fire and take advantage of the flame height regulation.

### TECHNICAL GLASS PANEL

The dedicated toughened glass panel covers and stabilizes the flame.

### AUTOMATIC BURNER

The automatic burner with the patented BEV Technology<sup>®</sup> is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.



### AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spilling the fuel.

### INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.

### BEST BUILD QUALITY



The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

### OPTIONAL REMOTE CONTROL

Take full control over the fireplace with the intuitive and minimalistic remote in your hand.



# Prime Fire 700 in Casing


(BEV Technology®)


## CONTROL OPTIONS



optional

|                         |  |
|-------------------------|--|
| Fuel tank capacity      | 1.9 L                                    |
| Maximum burn time       | 4.5 hours                                |
| Maximum heat output     | 4.4 kW                                   |
| Minimum room cubature   | 44 m <sup>3</sup>                        |
| Flame height regulation | 2 stages                                 |
| Weight                  | 12.3 kg                                  |
| Fuel type               | bioethanol 95 - 96,6%                    |
| Flue                    | not required                             |
| Air change rate         | 1 space volume per hour                  |
| Power supply            | 230 V                                    |
| Finish                  | black powder coating                     |
| Materials               | steel, galvanized steel, toughened glass |
| Application             | for indoor use only                      |

O-TL certified   
Manufactured to UL standards

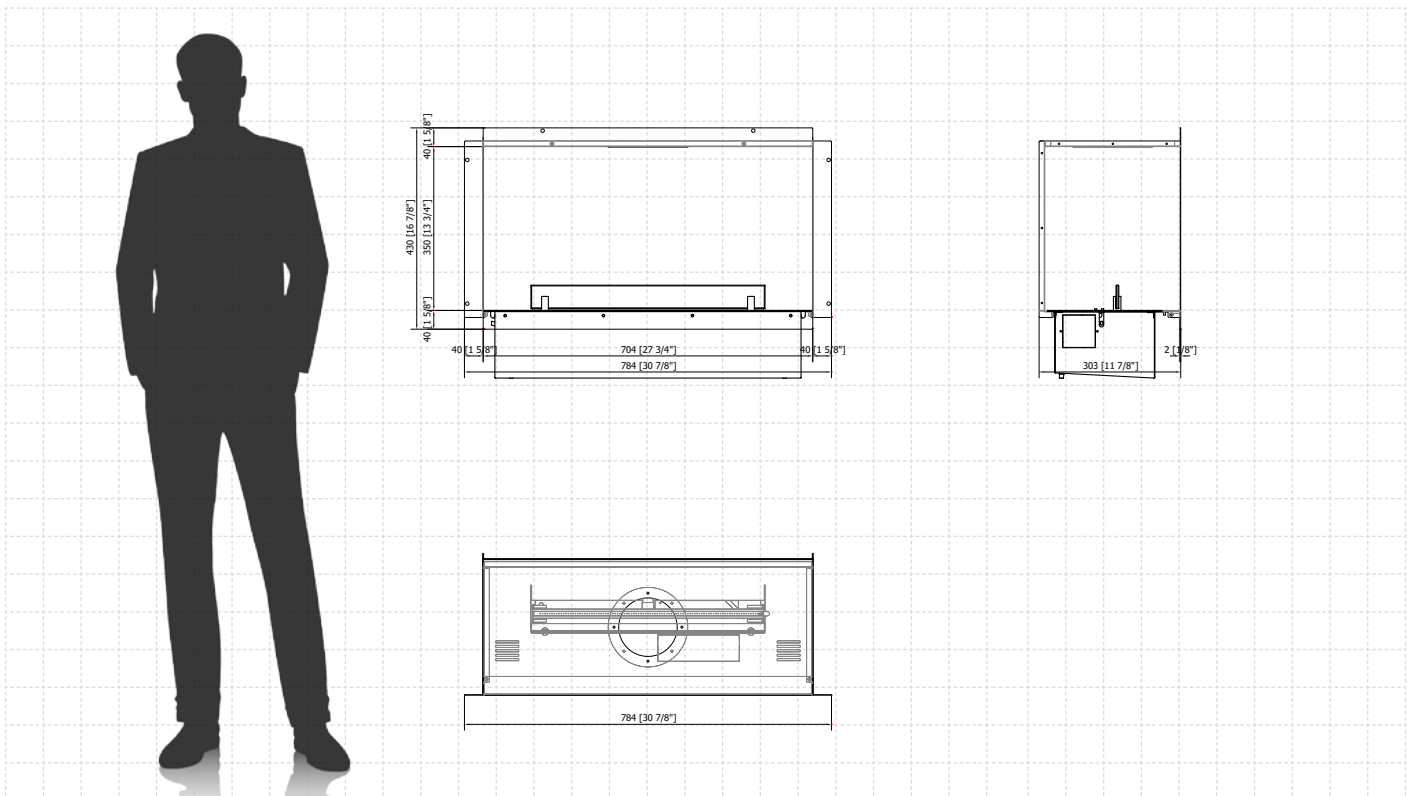

All product specifications and data are subject to change without notice and are believed to be accurate as of the date hereof. Planika Sp. z o.o., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Planika Sp. z o.o."), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any document or in any other disclosure relating to any product. To the maximum extent permitted by applicable law, Planika Sp. z o.o. disclaims any and all liability arising out of the application or use of any product. This document does not expand or otherwise modify Planika Sp. z o.o.'s terms and conditions of purchase, including but not limited to the warranty expressed therein. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Planika Sp. z o.o.. Customers using or selling Planika Sp. z o.o.'s products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Planika Sp. z o.o. for any damages arising or resulting from such use or sale. The images are indicative only.