

FORMA 1000 TUNNEL

WITH FLA3+ 790 AUTOMATIC ETHANOL BURNER

Net Zero fireplace with the BEV Technology[®]



BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

SEE-THROUGH FIREPLACE

The fireplace allows to keep the visual connection between spaces and provides natural flames in two rooms with only one fireplace.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.



INTEGRATED CONTROL PANEL

The FLA3+ burner has an intuitive control panel and an inlet for automatic refuelling.

REMOTE CONTROL

Control the fire with the included remote, app on your smartphone or home automation system.

AUTOMATIC FLA3+ BURNER

The automatic burner with the patented BEV Technology[®] is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapors and has no direct contact with the liquid fuel.

GLASS PANELS

The dedicated toughened glass panels cover the flame making it stable and even.

Forma 1000 Tunnel

Burner model	FLA3+ 790mm (BEV Technology®)
Fuel tank capacity	13.4 L
Maximum burn time	29 hours
Maximum heat output	4.4 kW
Minimum room cubature	44 m ³
Flame height regulation	6 stages
Weight	70.8 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only

CONTROL OPTIONS



included



included



optional


'FLA3 NET-ZERO' APP

Control the fire with your smartphone!




OPTIONAL DECORATIVE TRAY

Decorative tray with 1 ceramic log or white stones installed on the burner, behind the fireline.



O-TL certified 

Manufactured to UL standards

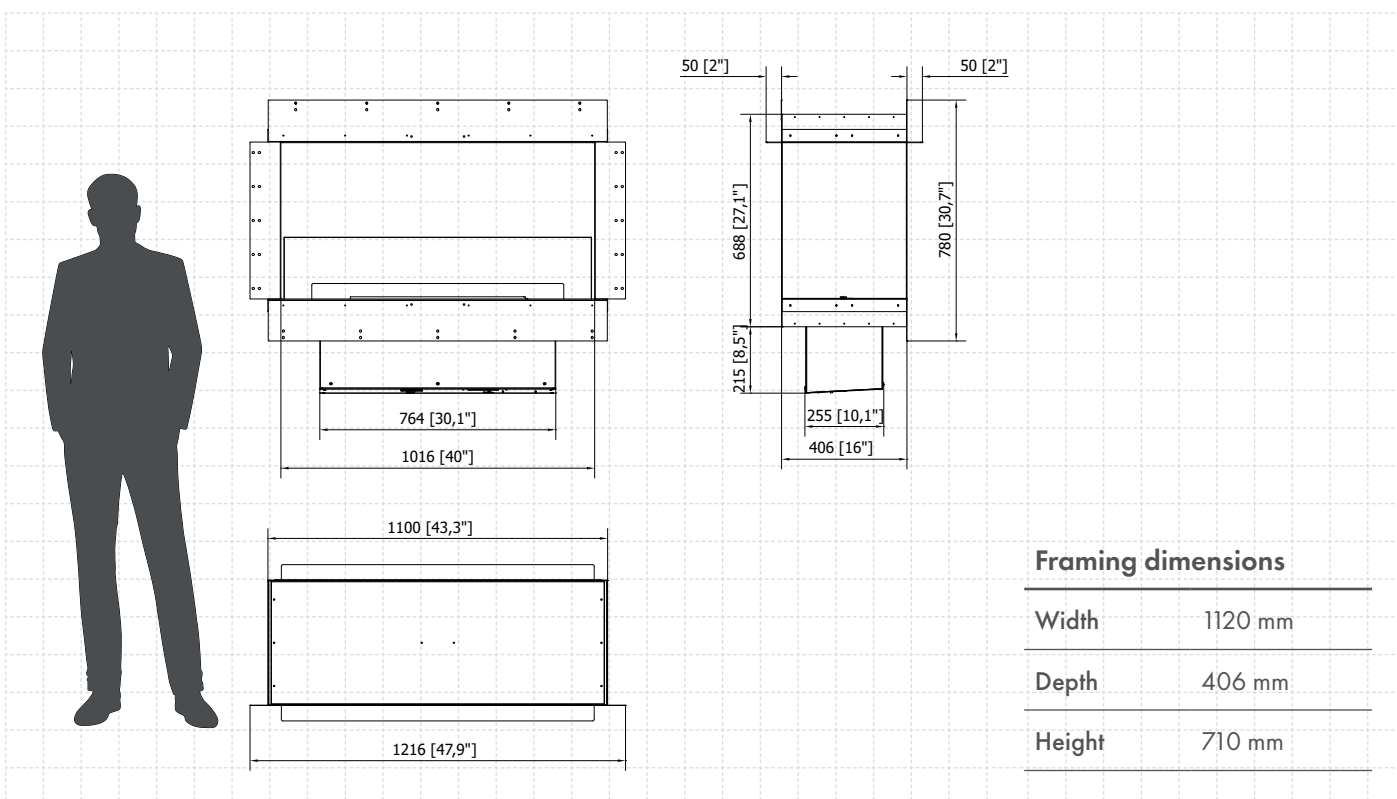

Framing dimensions

Width	1120 mm
Depth	406 mm
Height	710 mm